



SEXYCOMP76

INFORMATIONS

SEXYCOMP76 is a high quality photo-resistor compressor/limiter optimized for live use and studio recording with guitar, bass and acoustic string instruments.

It offers two modes:

1. Compressor
2. Limiter

COMPRESSOR: The use of the compressor is often made necessary to guarantee a greater length of the note played, better depth of sound, to attenuate excess signal peaks thus ensuring a unique sound stroke. SEXYCOMP76 properly adjusted will increase the volume level (clean threshold) of your amply.

LIMITER: The limiter mode is much more intuitive and is born in order to establish a maximum signal level also reducing energetically the excesses.

DETAILS

Its essentiality is at the base of a disarming simplicity of use allowing to always guarantee high performance.

The INPUT command establishes the "level" of intervention volume while the RATIO "how much".


OUTPUT adjusts the output volume restoring the correct proportion of sound in/out level.

TONE is a passive tone control useful for rebalancing the average acute frequencies to suit one's taste.

MODE is a mix from a whole compressor to a whole limiter. Only with the "MODE" level control can you switch between settings that are softer to an aggressive use of the unit.

CICOGNANI ENGINEERING reserves the right to modify the technical characteristics and layout of the products at any time and without notice. This product is built to the rule of art and observes the technical requirements of the Directives Europee 89/366EEC.

CONTROLS

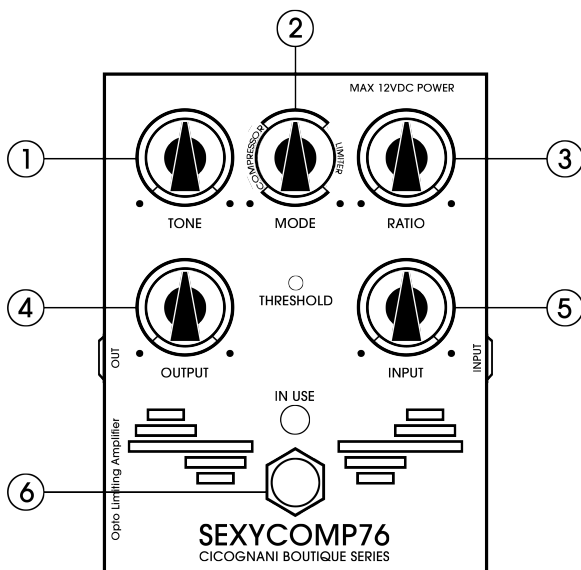

- 1. **Tone:** Tone control
- 2. **Mode:** Blend from Compressor to Limiter
- 3. **Ratio:** Ratio control
- 4. **Output:** Output level control
- 5. **Input:** Input level control
- 6. **Bypass:** On/Off effect

SPECIFICATIONS

Power In	9 to 12VDC (Negative Tip)
Consumption	Max 80mA to 12VDC
Input Impedance	<1M Ohm
Input Level	Max 1V
Gain Reduction	Up to 40db
Distortion	<0,28% @ +24db
Output Level	Max +24db
Tone Level and Filter	-6db @ 4400Hz
Boost Level	Max +12db
Max S/N Ratio	<80db @ Max Limiting value
Weight	0.3kg (0.6 lbs)
Length	120mm (4.7")
Width	94mm (3.7")
Height	45mm (1.770")

CAUTION! Make sure to check the power supply connection as per technical specifications. This pedal cannot be powered by a battery.

GURU ADVISES

1. Use good quality signal cables.
2. Avoid in case of connections with metal angle jacks that the body of the same is touched with that of the near pedals.
3. The power is very important. Connect the unit to a power supply able to supply a stabilized voltage between 9 and 12VDC with a current of at least 100mA in order to obtain the correct performances.
4. The pedal has a true-bypass switch so as not to contaminate the sound in case "not active". It is therefore not necessary to use miraculous buffers upstream or downstream of SEXYCOMP76.

WARRANTY TERMS

The guarantee of the products is two years from the purchase data. Switches, buttons, relays are one year. The thermionic valves, indicator lights, wiring cables are guaranteed for three months.

Responsibility of **CICOGNANI ENGINEERING** is limited to repair or replacement of the product at our discretion.

CICOGNANI ENGINEERING not be liable for damages resulting from loss of use of the product, lost time operation interrupted by non-use, loss of business or any other damages or incidental, consequential or otherwise; damage in transit or damage caused by inadequate packaging.

How to receive assistance: Send an email to sales@cicognani.eu in order to make agreements on how and where to send the product. The product must be sent together with a copy of the receipt/sales receipt. Shipping and packing costs are the responsibility of the purchaser.

THE WARRANTY IS NOT VALID WITHOUT A COPY OF YOUR RECEIPT OF SALE CERTIFYING THE DATE OF PURCHASE.





CICOGNANI ENGINEERING

Via Faentina, 44 - 48013 Brisighella (RA), Italy P.Iva: 02720280391