



SEXYBOOST2

INFORMATIONS

SEXYBOOST2 is an analog tube boost that integrates two important functions: clean signal boost and midrange boost. SEXYBOOST2 functions, in total sound transparency, makes it possible to excel in its features both in "front-preamp" and "post-preamp" use, always being excellent in all two modes of use. It's easy to use and the frequency filters are calibrated for the best performance sounds. One of the peculiarities of the "MID BOOST" is to increase the medium frequencies and at the same time attenuate the super high ones (Mosquito). This type of boost is very suitable for soloists as it allows you to be very presence without increase the volume level in a high way. It's also very interesting to boost an overdrive in order to obtain a powerful and fast crunch.

The valve plays an important role in ensuring incredible headroom.

DESIGNED AND HAND-BUILT IN ITALY


DETAILS

The pedal uses quality materials and is equipped with two switches: The first is a classic stable true-bypass necessary to activate and deactivate; The second allows you to choose the type of "boost" between clean (transparent) and midrange increase.

We recommend using power supplies that guarantee a good starting current. The valve in the moment of preheating needs an adequate current peak. The power supply is well "low noise" and "stabilized" to ensure the best characteristics of the product.

CICOGNANI ENGINEERING reserves the right to modify the technical characteristics and layout of the products at any time and without notice. This product is built to the rule of art and observes the technical requirements of the Directives Europee 89/366EEC.

CONTROLS

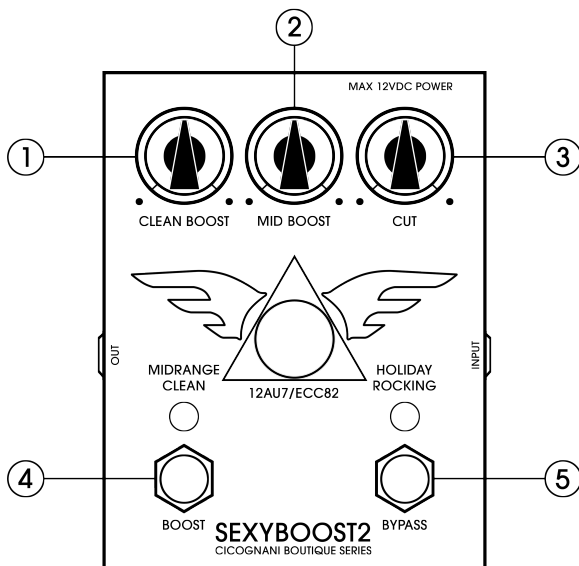

1. **Clean Boost:** Full range volume
2. **Mid Boost:** Mid Boost volume
3. **Cut:** Passive tone control
4. **Boost:** Selectable Mid Boost/Clean Boost
5. **Bypass:** On/Off effect

SPECIFICATIONS

Power In	12VDC (Negative Tip)
Consumption	Max 250mA
Input Impedance	<1M Ohm
Input Level	Max 1Vpp
Clean Boost Level	Max +8db
Middle Boost Level	Max +8db
Band Pass Frequency	250-5000 Hz
Tone Level	-6db
Tone Filter	4500 Hz
Max S/N Ratio	58db
Tube	12AU7/ECC82
Weight	0.3kg (0.6 lbs)
Length	120mm (4.7")
Width	94mm (3.7")
Height	45mm (1.770")

CAUTION! Make sure to check the power supply connection as per technical specifications. This pedal cannot be powered by a battery.

GURU ADVISES

1. Use good quality signal cables.
2. Avoid in case of connections with metal angle jacks that the body of the same is touched with that of the near pedals.
3. The power is very important. Connect the unit to a power supply able to supply a stabilized voltage 12VDC with a current of at least 250mA in order to obtain the correct performances.
4. The pedal has a true-bypass switch so as not to contaminate the sound in case "not active". It is therefore not necessary to use miraculous buffers upstream or downstream of **SEXYBOOST2**.

WARRANTY TERMS

The guarantee of the products is two years from the purchase data. Switches, buttons, relays are one year. The thermionic valves, indicator lights, wiring cables are guaranteed for three months.

Responsibility of **CICOGNANI ENGINEERING** is limited to repair or replacement of the product at our discretion.

CICOGNANI ENGINEERING not be liable for damages resulting from loss of use of the product, lost time operation interrupted by non-use, loss of business or any other damages or incidental, consequential or otherwise; damage in transit or damage caused by inadequate packaging.

How to receive assistance: Send an email to sales@cicognani.eu in order to make agreements on how and where to send the product. The product must be sent together with a copy of the receipt/sales receipt. Shipping and packing costs are the responsibility of the purchaser.

THE WARRANTY IS NOT VALID WITHOUT A COPY OF YOUR RECEIPT OF SALE CERTIFYING THE DATE OF PURCHASE.





CICOGNANI ENGINEERING

Via Faentina, 44 - 48013 Brisighella (RA), Italy P.Iva: 02720280391